

BHP3B1




M10 螺纹深 18,
安装泵时, n.8 M10 螺钉扭矩设定为
 47 ± 3 Nm.
轴伸 M14x1.5 螺母扭矩设定为 80 Nm.



M10 thread depth 18,
To mount the pump, n.8 M10 screws,
with a torque wrench setting fixed
at 47 ± 3 Nm.
Shaft M14x1.5 nut, with a torque
wrench setting fixed at 80 Nm.

出油口
OUTLET


进油口
INLET

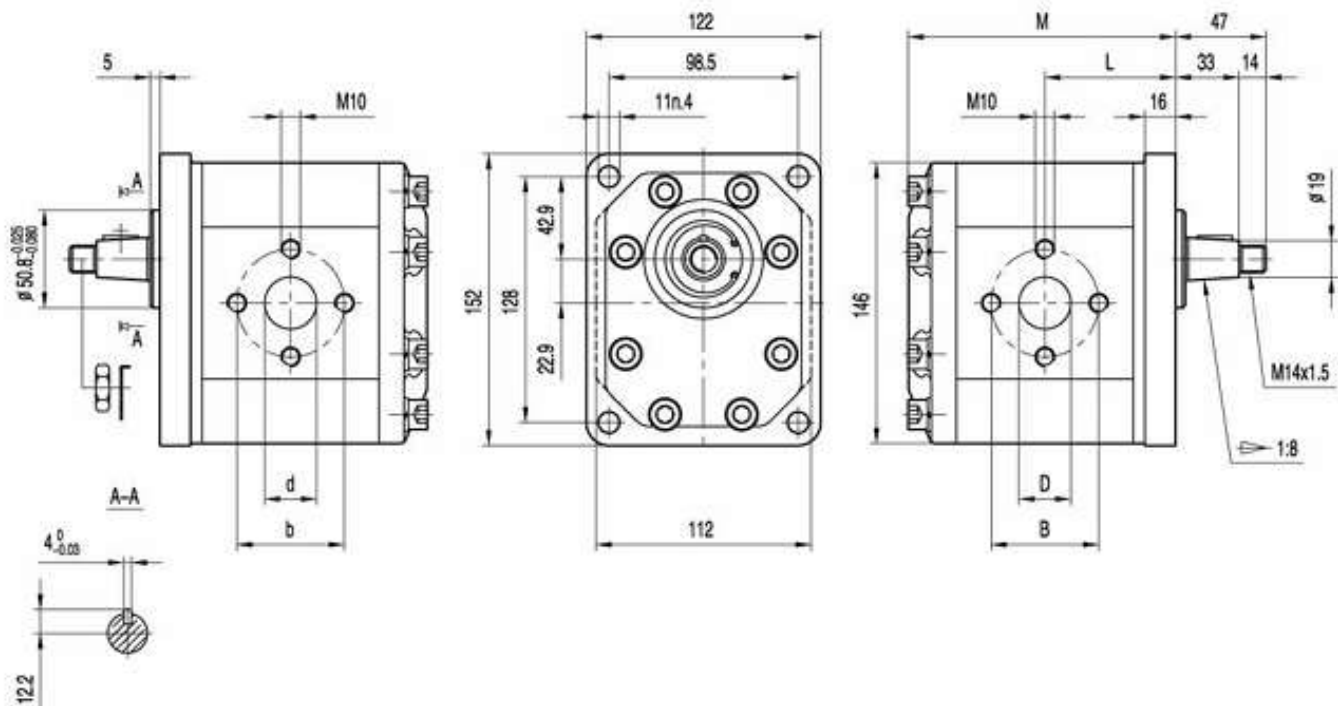


规格 Type	排量 Displacement	最大压力 Max pressure			最高转速 Max. speed	最低转速 Min. speed	尺寸 Dimensions					
		P1	P2	P3			M	L	B	D	b	d
	(cm ³ /rev)	bar	bar	bar	(r/min)	(r/min)	mm	mm	mm	mm	mm	mm
BHP3B1-D-20	20	250	265	280	3500	600	128	63	56	27	56	19
BHP3B1-D-22	22	250	265	280	3500	600	130	64	56	27	56	19
BHP3B1-D-26	26	250	265	280	3000	600	133	65	56	27	56	19
BHP3B1-D-33	33	230	250	270	3000	500	139	68	56	27	56	19
BHP3B1-D-39	39	230	250	270	3000	500	146	72	56	27	56	19
BHP3B1-D-46	46	230	250	270	3000	500	152	75	51	27	51	27
BHP3B1-D-50	50	220	240	260	3000	500	156	77	56	27	56	27
BHP3B1-D-52	52	220	240	260	3000	500	158	78	56	27	56	27
BHP3B1-D-55	55	200	230	250	2800	400	160	79	62	33	51	27
BHP3B1-D-63	63	200	230	250	2800	400	168	83	62	33	51	27
BHP3B1-D-71	71	180	200	220	2500	400	175	86	62	33	51	27

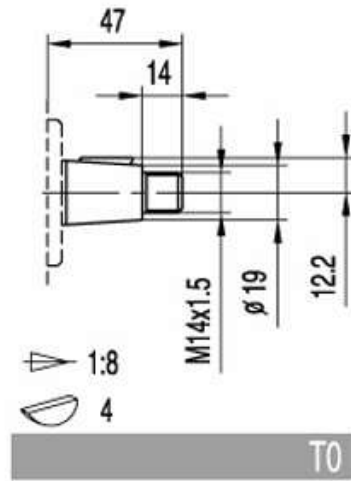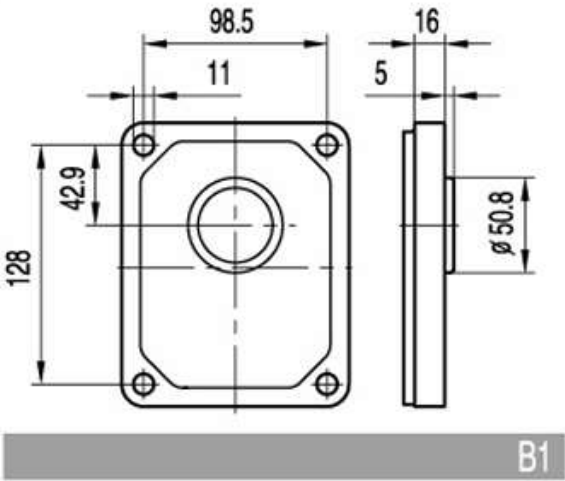

最大扭矩
Max.Torque 300 Nm

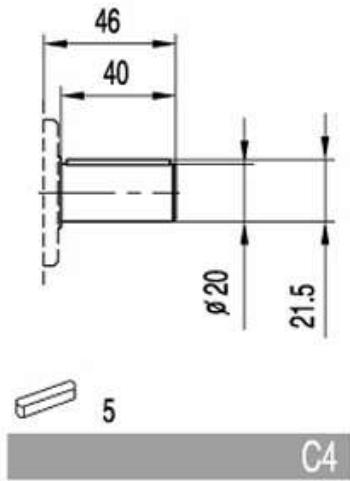

最大扭矩
Max.Torque 350 Nm



L0/L1/L2/L3

规格 TYPE	油口代号 PORTS CODE	进油口 INLET	出油口 OUTLET
		A	a
BHP3...20 ÷ BHP2...22	L0	G3/4	G3/4
BHP3...26 ÷ BHP2...39	L1	G 1	G3/4
BHP3...46 ÷ BHP2...63	L2	G1 1/4	G 1
BHP3...71	L3	G1 1/2	G1 1/4