
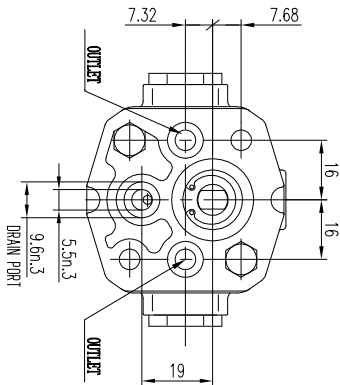
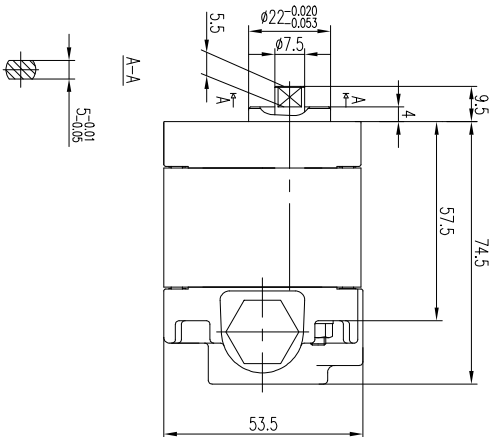


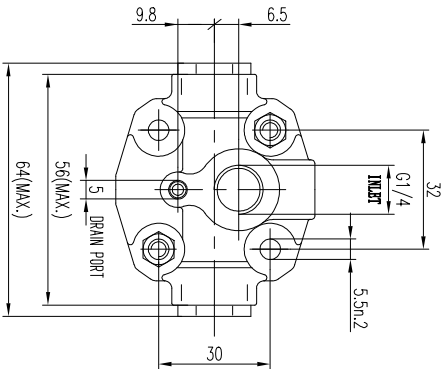

Pump Data

Pump Code	BKPO.5-B5-R-1.0-G0-X-LJ0-VQ2	
Rotation	bi-rotation	
Displacement(cm³/rev)	1.0	
Continuous Pressure(bar)	P1	150
Intermittent Pressure(bar)	P2	170
Peak Pressure(bar)	P3	190
Max.Suction Pressure(bar)	0.7	
Speed(rpm)	min.	850
	max.	5000
Seals Type	NBR	
Min. Temperature(°C)	Continuous	0
	Intermittent	-20
Max. Temperature(°C)	Continuous	+80
	Intermittent	+100

JIS JDT SCALE DRAWING		Item No.		Seri. Manuf. Part	
Critical dimension	Dimension tolerance	Unless otherwise specified		Customer	Dimension
		0.5	6		
Location	Type of document	6	30	Weight (kg)	Created by
		120	400		
		1000	2000	Released by	
		±0.3	±0.5		
		±0.8	±1.2	Drawing No.	Revision
		±2.0	±3.0		
Remove burrs					
Break edges 013 - 025					
Status		Scale			
Page 1 / 1					

This document contains information of a proprietary nature which is the property of Sanyo Electric Co., Ltd. and its subsidiaries. It is not to be distributed outside of the company without the prior written consent of Sanyo Electric Co., Ltd.

Copyright © 2008 Sanyo Electric Co., Ltd.

This document contains information of a proprietary nature which is the property of Bodan Hydraulics. Disclosure of the information contained herein to any unauthorized person without the written consent of Bodan Hydraulics is strictly prohibited.

博頓液壓股份
Boden-hyd